

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : C08F 210/02, 4/643	A1	(11) International Publication Number: WO 00/24792 (43) International Publication Date: 4 May 2000 (04.05.00)
(21) International Application Number: PCT/US99/24600 (22) International Filing Date: 21 October 1999 (21.10.99) (30) Priority Data: 60/105,329 23 October 1998 (23.10.98) US (71) Applicant: EXXON CHEMICAL PATENTS INC. [US/US]; 5200 Bayway Drive, Baytown, TX 77520-5200 (US). (72) Inventors: RODRIGUEZ, George; 13827 Placid Brook Court, Houston, TX 77059 (US). CROWTHER, Donna, J.; 2725 Moss Court, Seabrook, TX 77586 (US). (74) Agents: MULLER, William, G. et al.; Exxon Chemical Company, Law Technology, P.O. Box 2149, Baytown, TX 77522-2149 (US).		(81) Designated States: AU, BR, CA, CN, JP, KR, MX, RU, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: OLEFIN COPOLYMERIZATION PROCESS WITH BRIDGED HAFNOCENES (57) Abstract The invention is directed to olefin polymerization processes using bridged hafnocene catalyst complexes that are surprisingly stable under high temperature olefin polymerization processes such that olefin copolymers can be prepared with high molecular weights and catalyst activities. More specifically, the invention is a polymerization process for ethylene copolymers having a melt index of about 0.850 to about 0.930 comprising contacting, under homogeneous polymerization conditions at a reaction temperature at or above 60 °C to 225 °C, ethylene and one or more comonomers capable of insertion polymerization with a bridged hafnocene catalyst complex derived from: A) a biscyclopentadienyl hafnium organometallic compound having: i) at least one unsubstituted cyclopentadienyl ligand or aromatic fused-ring substituted cyclopentadienyl ligand; ii) one aromatic fused-ring substituted cyclopentadienyl ligand; iii) and a covalent bridge connecting the two cyclopentadienyl ligands, said bridge comprising a single carbon or silicon atom with two aryl groups, each substituted with a C ₁ -C ₂₀ hydrocarbyl or hydrocarbylsilyl group at least one of which is a linear C ₃ or greater substituent; and B) an activating cocatalyst.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TITLE: **OLEFIN COPOLYMERIZATION PROCESS WITH**
 BRIDGED HAFNOCENES

5

TECHNICAL FIELD

This invention relates to olefin copolymerization processes using substituted hafnocene catalyst compounds with noncoordinating anions.

10

BACKGROUND ART

15

20

Olefin polymers comprising ethylene and at least one or more α -olefin and optionally one or more diolefin make up a large segment of polyolefin polymers and will be addressed as "ethylene copolymers" herein. Such polymers range from crystalline polyethylene copolymers to largely amorphous elastomers, with a new area of semi-crystalline "plastomers" in between. In particular, ethylene copolymer plastomers are now a well established class of industrial polymers having a variety of uses associated with their unique properties, such as elastomeric properties and their thermo-oxidative stability. Uses of the plastomers include general thermoplastic olefins, films, wire and cable coatings, polymer modification (by inclusion in blends with other polyolefins), injection molding, foams, footwear, sheeting, functionalized polymers (such as by free-radical graft addition of polar monomers) and components in adhesive and sealant compounds.

25

30

Commercially prepared ethylene copolymers have been traditionally been made via Ziegler-Natta polymerization with catalyst systems largely based on vanadium or titanium. Newer metallocene catalyst compounds have received attention due to their ease of larger monomer incorporation and potential increases in polymerization activities. U.S. patent 5,324,800 describes metallocenes having substituted and unsubstituted cyclopentadienyl ligands which are suitable for producing high molecular weight olefin polymers, including linear, low density copolymers of ethylene with minor amounts of α -olefin.

Noncoordinating anions useful as catalyst components with such metallocenes is known. The term "noncoordinating anion" is now accepted terminology in the field of

olefin polymerization, both by coordination or insertion polymerization and carbocationic polymerization. The noncoordinating anions function as electronic stabilizing cocatalysts, or counterions, for cationic metallocenes which are active for olefin polymerization. The term "noncoordinating anion" as used here and in the references applies both to noncoordinating anions and weakly coordinating anions that are not so strongly coordinated to the cationic complex as so to be labile to replacement by olefinically or acetylenically unsaturated monomers at the insertion site. U.S. patent 5,198,401 describes a preferred noncoordinating anion tetra(perfluorophenyl) boron, $[B(pfp)_4]^-$ or $[B(C_6F_5)_4]^-$, wherein the perfluorinated phenyl ligands on the boron makes the counterion labile and stable to potential adverse reactions with the metal cation complexes.

The utility of metallocene-based ionic catalysts in high temperature olefin polymerization is described in U.S. patents 5,408,017 and 5,767,208, EP 0 612 768, and WO 96/33227. Each addresses suitable metallocene catalysts for high temperature processes for olefin copolymerization. High molecular weight ethylene/ α -olefin copolymers is an objective of EP 0 612 768 and is addressed with catalyst systems based on bis(cyclopentadienyl/indenyl/fluorenyl) hafnocenes which are combined with an alkyl aluminum compound and an ionizing ionic compound providing a non-coordinating anion.

As described above, a recognized problem for high temperature polymerization, particularly where significant content of comonomer incorporation in ethylene copolymers is to be sought, is an observed decrease in molecular weight, or increase in melt index (MI). Means of maintaining high molecular weights, or low M.I., in ethylene copolymers of low density (high comonomer content) while operating at economically preferable high polymerization reaction temperatures and high polymer production rates is highly desirable.

BRIEF SUMMARY OF THE INVENTION

The invention thus addresses specifically substituted, bridged hafnocene catalyst complexes comprising noncoordinating anions that are surprisingly stable under high temperature olefin polymerization processes such that olefin copolymers with high molecular weights can be prepared at surprisingly high production rates. More

specifically, the invention relates to a polymerization process for ethylene copolymers having a density of about 0.850 to about 0.930 comprising contacting, under supercritical or solution polymerization conditions at a reaction temperature at, or above, 60 °C to 225 °C, or below, ethylene and one or more comonomers capable of insertion polymerization with a hafnocene catalyst complex derived from A) a biscyclopentadienyl hafnium organometallic compound having i) at least one unsubstituted cyclopentadienyl ligand or aromatic fused-ring substituted cyclopentadienyl ligand not having additional substituents on said ligand, ii) one substituted or unsubstituted, aromatic fused-ring substituted cyclopentadienyl ligand, and iii) a covalent bridge connecting the two cyclopentadienyl ligands, said bridge comprising a single carbon or silicon atom with two aryl groups, each substituted with a C₁ - C₂₀ hydrocarbyl or hydrocarbylsilyl group at least one of which is a linear C₃ or greater substituent; and B) an activating cocatalyst, preferably a precursor ionic compound comprising a halogenated tetraaryl-substituted Group 13 anion.

DETAILED DESCRIPTION OF THE INVENTION

The bridged hafnium compounds of the invention include those having a single substituted carbon or silicon atom bridging two cyclopentadienyl-containing (Cp) ligands of the hafnium metal centers (iii), the aromatic fused-ring substituted cyclopentadienyl ligand or ligands, preferably those containing C₁-C₃₀ hydrocarbyl or hydrocarbylsilyl substituents on the ii) non-cyclopentadienyl aromatic ring. The bridge substituents preferably comprise C₁-C₂₀ linear or branched alkyl, or C₁-C₂₀ substituted-silyl, substituted phenyl groups, the alkyl or substituted-silyl substituents located in the para- or meta-positions of the aryl groups, preferably wherein at least one of said alkyl substituents is a C₃ or higher linear n-alkyl substituent, preferably C₄ or higher. Specific examples include methyl, ethyl, n-propyl, n-butyl, sec-butyl, isobutyl, tert-butyl, n-pentyl, neopentyl, etc. Substituents present on the non-cyclopentadienyl aromatic rings of the aromatic fused-ring substituted cyclopentadienyl ligand (ii), such inclusive of indenyl and fluorenyl derivatives of cyclopentadienyl groups, typically include one or more C₁ to C₃₀ hydrocarbon or hydrocarbylsilyl groups selected from linear, branched, cyclic, aliphatic, aromatic or combined structure groups, including fused-ring or pendant configurations. Examples include methyl, isopropyl, n-propyl, n-butyl, isobutyl, tertiary butyl, neopentyl,

phenyl, n-hexyl, cyclohexyl, and benzyl. For the purposes of this application the term "hydrocarbon" or "hydrocarbyl" is meant to include those compounds or groups that have essentially hydrocarbon characteristics but optionally contain not more than about 10 mol.% non-carbon atoms, such as boron, silicon, oxygen, nitrogen, sulfur and phosphorous. "Hydrocarbylsilyl" is exemplified by, but not limited to, dialkyl- and trialkylsilyls. Similarly the use of hetero-atom containing cyclopentadienyl rings or fused rings, where a non-carbon Group 14, 15 or 16 atom replaces one of the ring carbons in the Cp ring or in a ring fused thereto, is considered for this specification to be within the terms "cyclopentadienyl", "indenyl", and "fluorenyl". See, for example, the teachings of WO 98/37106, having common priority with U.S. Ser. No. 08/999,214, filed 12/29/97, and WO 98/41530, having common priority with U.S. Ser. No. 09/042,378, filed 3/13/98, incorporated by reference for purposes of U.S. patent practice.

Specific bridged hafnium catalysts include those derived from: (1) indenyl-based complexes such as the isomers, or mixtures, of (para-n-butylphenyl)(para-t-dialkyl butylphenyl)methylene (fluorenyl) (indenyl) hafnium dimethyl, (para-n-propylphenyl)(para-methylphenyl)methylene (fluorenyl) (indenyl) hafnium dimethyl, di(para-n-butylphenyl)methylene (2,7-di tertbutyl fluorenyl) (indenyl) hafnium dimethyl, (para-n-butylphenyl)(para-t-butylphenyl)methylene (2,7-di tertbutyl fluorenyl) (indenyl) hafnium dimethyl, (para-n-butylphenyl)(para-t-butylphenyl)methylene (2,7-dimethyl fluorenyl)(indenyl) hafnium dibenzyl and di(para-n-butylphenyl) methylene (fluorenyl) (indenyl) hafnium dimethyl; and, (2) fluorenyl-based complexes such as (para-n-propylphenyl)(para-i-propylphenyl)silyl (fluorenyl) (fluorenyl) hafnium di-t-butyl, di(para-n-propylphenyl)methylene (2,7-di-tert-butyl-5-methylfluorenyl) (fluorenyl) hafnium dimethyl; and (3) cyclopentadienyl-based complexes such as the isomers, or mixtures, of (para-n-propylphenyl)(para-i-propylphenyl)methylene (fluorenyl) (indenyl) hafnium dimethyl, (para-n-butylphenyl)(para-t-butylphenyl)methylene (fluorenyl) (cyclopentadienyl) hafnium dimethyl, di(para-n-butylphenyl)methylene (2,7-di tertbutyl fluorenyl) (cyclopentadienyl) hafnium dimethyl, (para-n-butylphenyl)(para-t-butylphenyl)methylene (2,7-di tertbutyl fluorenyl) (cyclopentadienyl) hafnium dimethyl, and di(para-n-butylphenyl)methylene (2,7-dimethyl fluorenyl)(cyclopentadienyl) hafnium dimethyl or dibenzyl. It has been found that the substituted bridge-containing compounds,


such as those asymmetric compounds listed above, are particularly useful in accordance with the invention.

In particular, for the bridged hafnium compounds, increasing the degree of substitution on the aromatic fused-ring substituted ligand (ii) is effective for increased molecular weight, as is the use of the invention covalent bridge (iii) between the cyclopentadienyl ligands as described above. The substituted aryl groups of the bridging atom contribute to surprisingly increased activity, or productivity of the catalyst, as compared to the simpler diaryl substituted analogs, without detrimental effect on the molecular weight of the resulting copolymers. Preferably substitution on fluorenyl or indenyl radicals (ii) in the hafnium compounds will generally comprise two or more C₁ to C₃₀ hydrocarbyl or hydrocarbylsilyl substituents for a ring hydrogen of at least one 6-member fused-ring, preferably both where fluorenyl.

The invention activating cocatalyst, precursor ionizing compounds comprise Group 13 element complexes having at least two halogenated aromatic ligands such as the halogenated tetraphenyl boron and aluminum compounds exemplified in the identified prior art. Preferred aromatic ligands consist of polycyclic aromatic hydrocarbons and aromatic ring assemblies in which two or more rings (or fused ring systems) are joined directly to one another or together. These ligands, which may be the same or different, are covalently bonded directly to the metal/metalloid center. In a preferred embodiment the aryl groups are halogenated tetraaryl Group 13 element anionic complexes comprising at least one fused polycyclic aromatic hydrocarbon or pendant aromatic ring. Indenyl, naphthyl, anthracyl, heptalenyl and biphenyl ligands are exemplary. Thus, for example, suitable ligands include those illustrated below, the open bond being to the Group 13 atom. See also the polycyclic compound examples in the literature for additional ligand selection, e.g., Nomenclature of Organic Compounds, Chs. 4-5 (ACS, 1974).


6

1

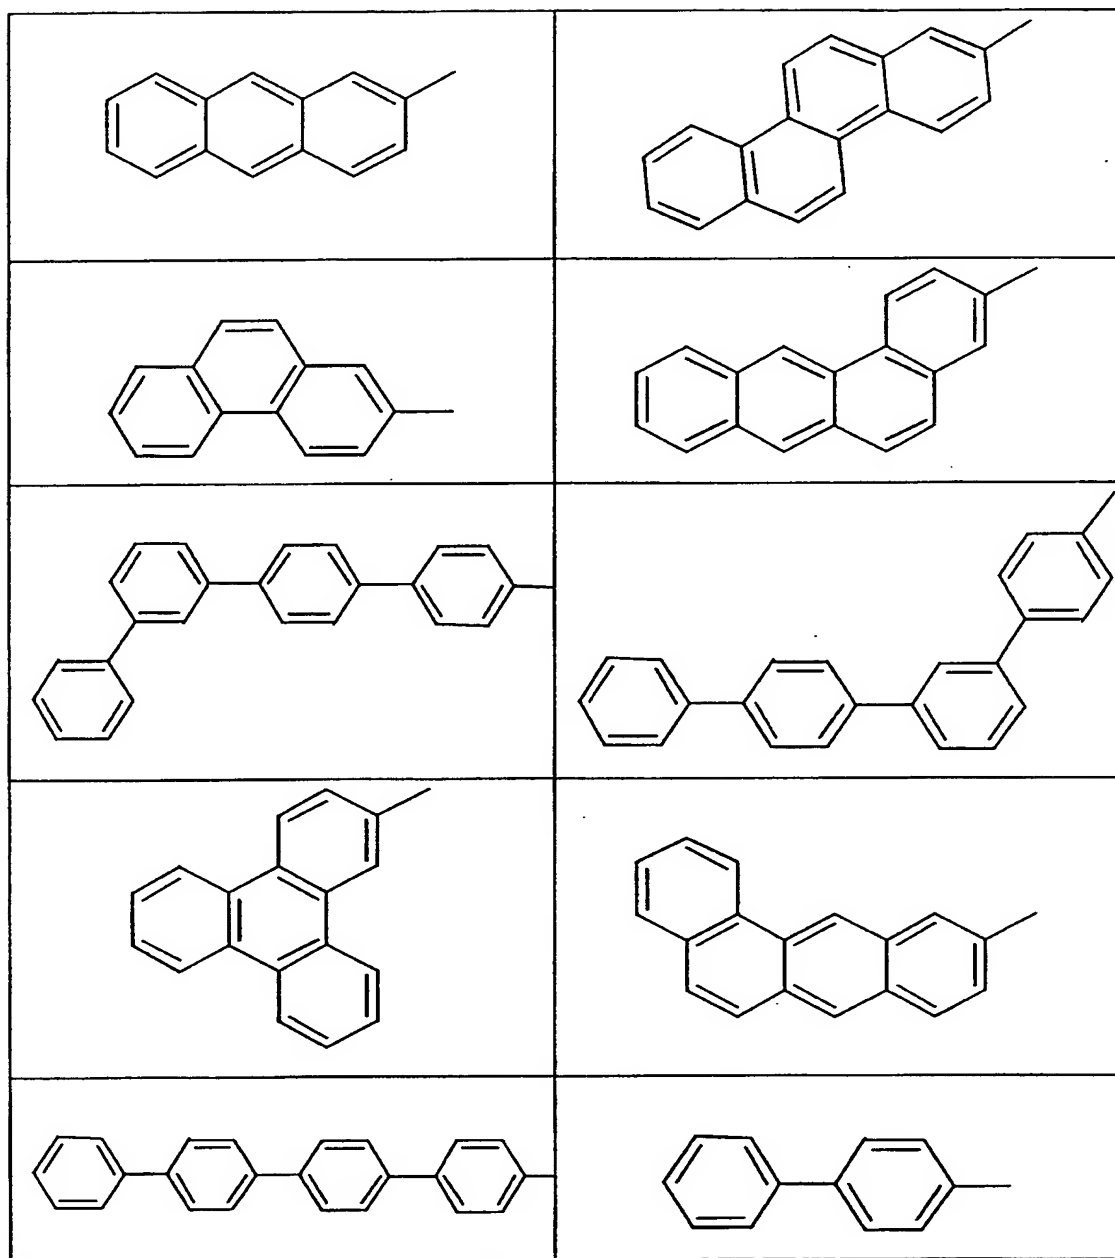

5 These preferred ionizing compounds comprise salts of anions comprising ligands capable of a tetrahedral orientation. Thus those ligands structurally compatible with each other in the sense of being bonded to the Group 13 metal center without hindering the bonding of additional halogenated, aryl ligands thereto are preferred. Examples include

those having pendant aryl groups at the para- or meta-position of the aryl ring closest to the metal/metalloid center, and those having fused aryl groups bonded to the aryl ring closest to the metal/metalloid center at the 2-, 3- or 3-, 4- positions. See Table I above. Those anions with mixed ligands are also suitable. Tris(perfluorophenyl) (perfluoronaphthyl) borate is an illustrative complex. Thus, generically speaking, the Group 13 complexes useful in accordance with the invention will typically conform to the following formula:



where, M is a Group 13 element, A is a nonhindering ligand as described above, C is a hindering ligand, one having bulky substituents on the closest aryl ring bonded to the metal/metalloid center other than those described as suitable above, and n = 0, 1, or 2. See also copending application U.S. serial number 60/087447, filed 1 June 1998, and its equivalent WO 99/45042, the teachings of which are referred to and incorporated by reference for purposes of U.S. patent practice.

For both fused aromatic rings and aromatic ring assemblies, the halogenation is highly preferred so as to allow for increased charge dispersion that contributes along with steric bulk as independent features decreasing the likelihood of ligand abstraction by the strongly Lewis acidic metallocene cation formed in the catalyst activation. Additionally, halogenation inhibits reaction of the hafnium cation with any remaining carbon-hydrogen bonds of the aromatic rings, and perhalogenation precludes such potential undesirable reactions. Thus it is preferred that at least one third of hydrogen atoms on carbon atoms of the aryl ligands can be replaced by halogen atoms, and more preferred that the aryl ligands be perhalogenated. Fluorine is the most preferred halogen, perfluorinated aryl ligands are most preferred.

Means of preparing ionic catalyst systems comprising catalytically active cations of the hafnium compounds and suitable noncoordinating anions are conventionally known, see for example U.S. patent 5,198,401, WO 92/00333, WO 97/22639, and EP 0 612 768. Typically the methods comprise obtaining from commercial sources or synthesizing the

selected transition metal compounds comprising an abstractable ligand, e.g., hydride, halide, alkyl, alkenyl or hydro-carbyl-silyl group, and contacting them with a noncoordinating anion source or suitable precursor compounds in a suitable solvent. The anion precursor compound abstracts a monoanionic ligand (or one monoanionic bond of bidentate alkenyl ligands) that completes the valency requirements of the preferred hafnium metallocene compounds. The abstraction leaves the hafnocenes in an essentially cationic state which is counterbalanced by the stable, compatible and bulky, noncoordinating anions according to the invention. Each of the documents of this paragraph are incorporated by reference for purposes of U.S. patent practice.

The noncoordinating anions are preferably introduced into the catalyst preparation step as ionic compounds having an essentially cationic complex which abstracts a non-cyclopentadienyl, labile ligand of the transition metal compounds which upon abstraction of the non-cyclopentadienyl ligand, leave as a by-product the noncoordinating anion portion. Hafnium compounds having labile hydride, alkyl, or silyl ligands on the metal center are highly preferred for the ionic catalyst systems of this invention since known in situ alkylation processes may result in competing reactions and interactions that tend to interfere with the overall polymerization efficiency under high temperature conditions in accordance with the preferred process embodiments of the invention.

Suitable cations for precursor compounds capable of providing the noncoordinating anions of the invention cocatalysts include those known in the art. Such include the nitrogen-containing cations such as those in U.S. patent 5,198,401, the carbenium, oxonium or sulfonium cations of US patent 5,387,568, metal cations, e.g., Ag⁺ or Li⁺, the silylium cations of WO 96/08519, and the hydrated salts of Group 1 or 2 metal cations of WO 97/22635.

Examples of preferred precursor salts of the noncoordinating anions capable of ionic cationization of the metallocene compounds of the invention, and consequent stabilization with a resulting noncoordinating anion include trialkyl-substituted ammonium salts such as triethylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tri(n-butyl)ammonium tetrakis(perfluoronaphthyl) or

tetrakis(perfluoro-4-biphenyl)boron, tri(n-octyl)ammonium tetrakis(perfluoronaphthyl) or
tetrakis(perfluoro-4-biphenyl)boron, trimethylammonium tetrakis(perfluoronaphthyl) or
tetrakis(perfluoro-4-biphenyl)boron, trimethylammonium tetra tetrakis(perfluoronaphthyl)
or tetrakis(perfluoro-4-biphenyl)boron, tributylammonium tetrakis(perfluoronaphthyl) or
5 tetrakis(perfluoro-4-biphenyl)boron, tripropylammonium tetrakis(perfluoronaphthyl) or
tetrakis(perfluoro-4-biphenyl), tributylammonium tetrakis(perfluoronaphthyl) or
tetrakis(perfluoro-4-biphenyl)boron, tributylammonium tetrakis(perfluoronaphthyl) or
tetrakis(perfluoro-4-biphenyl)boron, tributylammonium tetrakis(perfluoronaphthyl) or
tetrakis(perfluoro-4-biphenyl)boron, tri(n-butyl)ammonium tetrakis(perfluoronaphthyl) or
10 tetrakis(perfluoro-4-biphenyl)boron and the like; N,N-dialkyl anilinium salts such as N,N-
dimethylanilinium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, N,N-
di(n-dodecyl)anilinium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron,
N,N-2,4,6-pentamethylanilinium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-
biphenyl)boron and the like; dialkyl ammonium salts such as di-(n-dodecyl)ammonium
15 tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, dicyclohexylammonium
tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron and the like; and triaryl
phosphonium salts such as triphenylphosphonium tetrakis(perfluoronaphthyl) or
tetrakis(perfluoro-4-biphenyl)boron, tri(methylphenyl)phosphonium tetrakis (per-
fluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tri(dimethylphenyl) phosphonium
20 tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron and the like. See also
the long chain group-containing nitrogen Lewis acid complexes (e.g., of protonated
ammonium salts) of WO 97/35983, the catalyst activators of which are suitable in
accordance with this invention and the teachings of which is incorporated by reference for
purposes of US prosecution.

25

Further examples of suitable anionic precursors include those comprising a stable
carbenium ion, and a compatible non-coordinating anion. These include tropillium
tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl) borate, triphenylmethylium
tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl) borate, benzene (diazonium)
30 tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl) borate, tropillium
tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate, triphenylmethylium
tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate, benzene (diazonium)

tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl) borate, tropillium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate, triphenylmethylium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate, benzene (diazonium) tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate. The essentially
5 structurally equivalent silylium borate or aluminate salts are similarly suitable.

The term "scavenger" as used in this application is used in its art-recognized sense of being sufficiently Lewis acidic to coordinate with polar contaminants and impurities adventitiously occurring in the polymerization feedstreams or reaction medium. Such
10 impurities can be inadvertently introduced with any of the polymerization reaction components, particularly with solvent, monomer and catalyst feed, and adversely affect catalyst activity and stability. In particular, for processes utilizing recycle streams of unconverted monomer for reprocessing, the necessity to use polar compounds as catalyst deactivators, or "killers", such as water or lower alcohols, effectively necessitates the use
15 of scavengers, as does the natural occurrence of polar impurities in monomer feedstreams. It can result in decreasing or even elimination of catalytic activity, particularly when a metallocene cation-noncoordinating anion pair is the catalyst system. The polar impurities, or catalyst poisons include water, oxygen, metal impurities, etc. Preferably steps are taken before provision of such into the reaction vessel, for example by chemical
20 treatment or careful separation techniques after or during the synthesis or preparation of the various components, but some minor amounts of scavenging compound will still normally be required in the polymerization process itself.

Typically the scavenging compound will be an organometallic compound such as
25 the Group-13 organometallic compounds of US patent 5,241,025, EP-A-0 426 638 and those of U.S. patent 5,767,208. Exemplary compounds include triethyl aluminum, triethyl borane, tri-isobutyl aluminum, methylalumoxane, isobutyl aluminumoxane, tri-n-hexyl aluminum and tri-n-octyl aluminum, those having bulky substituents covalently bound to the metal or metalloid center being preferred to minimize adverse interaction with the
30 active catalyst. Addition of excess scavenger causes lower productivity, molecular weight and comonomer incorporation. The aluminum to hafnium molar ratios (Al:Hf) should accordingly be less than about 100: 1, preferably less than about 75:1, more preferably less

than about 50:1, and most preferably less than about 30:1. Molar ratios of less than 20:1 and less than 15:1 have been observed to be sufficient for the continuous processes described in this application.

5 The preferred scavenger is a long chain, linear tri-alkyl aluminum compound, and that longer chains are preferred over shorter chains. See WO 97/22635 and U.S. patent 5,767,208 for further discussion, this document is incorporated by reference for purposes of U.S. patent practice. Non-limiting examples of effective long chain, linear tri-alkyl ligand-containing scavengers include those comprised in the group defined by the formula $M'R'R''R'''$, where M' is Al, and each of the R groups independently is a C₄ or higher linear, branched or cyclic alkyl group, preferably C₆ or higher, most preferably C₈ or higher. The long chain, linear alkyl aluminums where each alkyl substituent was of a length of C₈ or higher, preferably C₉ and higher were observed to exhibit optimal performance, that defined as having the least deleterious effect when used at a level in
10 excess of the optimum level as described in the following paragraph. Specifically included are: tri-n-octyl aluminum, tri-n-decyl aluminum, tri-n-dodecyl aluminum, tri-n-hexadecyl aluminum, and the higher carbon number equivalents, e.g., (C₂₀)₃Al, including those with mixed ligation, and mixed scavenger compounds as well. The hydrolyzed derivatives of these alkyl-ligand containing organoaluminum compounds will additionally
15 be suitable. Additionally, it will be apparent that those scavenging compounds comprising both long-chain, linear and bulky ligands or mixed linear ligands, each ligand as described above, will also be suitable, but perhaps less desirable due to more involved or expensive syntheses.

25 A preferred polymerization process is that designed or conducted such that the cocatalyst components, that is the transition metal compounds and the anion precursor compounds, are maintained separately until just prior to or during polymerization use in the chosen reactor or reactors. An example is the use of dual injection of each catalyst component directly into the reactor or the use of T- or multi-joint mixing chambers just
30 prior to injection into the reactor. Additional optimization can be achieved when the scavenger compound is introduced into the reactor independently of the catalyst system or

compounds, preferably after the activation of the hafnocenes with the anion precursor cocatalysts.

5 The process of the invention is applicable to high pressure homogeneous polymerization, preferably employing less than 30 wt% of solvent, which is substantially adiabatic and where the heat of polymerization is accommodated by a rise in temperature of the reactor contents instead of internal or external cooling. In this case, the contents consist principally of unreacted monomer. Such process may be performed, under a single or dual phase homogeneous conditions at pressures from 250 to 3000 bar, preferably from 10 500 to 2500 bar, with or without unreactive diluents or solvents at temperatures generally above the melting point of the polymer being produced. Such processes are industrially known and may include the use of scavenger compounds and catalyst deactivation or killing steps, see for example U.S. patent 5,408,017, WO 95/07941, and WO 92/14766. Each of these documents and their U.S. counterparts are incorporated by reference for 15 purposes of U.S. patent practice. Preferred catalyst deactivators, or killers, include high molecular weight, non-recyclable compounds, such as poly vinyl alcohol which exhibit the functional capacity to complex with the catalysts so as to deactivate them while not forming volatile polar by-products or residual unreacted compounds.

20 The process of the invention is also especially applicable to homogeneous solution polymerization which is also substantially adiabatic, that is to say the heat of polymerization is accommodated by a rise in temperature of the polymerization reactor contents, here principally solvent. This adiabatic process typically would have no internal cooling and suitably no external cooling. The reactor outlet stream removes the heat of 25 polymerization from the reactor. The productivity of such adiabatic processes can be improved by cooling the inlet solvent and/or monomer stream(s) prior to introduction into the reactor to permit a greater polymerization exotherm. Thus the catalyst, cocatalyst and scavenger selections disclosed in this application can be advantageously practiced in a continuous, solution process operated at or above 140 °C, above 150 °C or above 160 °C, 30 up to about 225 °C. Most preferably the solution polymerization process for semi-crystalline polymers operated at a temperature from 140 °C - 220 °C. Typically this

process is conducted in an inert hydrocarbon solvent, linear, cyclic or branched aliphatic, or aromatic, at a pressure of from 20 to 200 bar.

5 These catalysts' ability to provide a commercially desirable polymer at elevated temperatures contributes to a greater exotherm, to high polymer contents in the reactor because of lower viscosity, and to reduced energy consumption in evaporating and recycling solvent, and better monomer and comonomer conversions.

10 The α -olefins suitable for use in the preparation of the ethylene copolymers, or for the polyethylene copolymers, are preferably C_3 to C_{20} α -olefins, but will include higher carbon number olefins such as polymerizable macromers having up to five hundred carbon atoms, or more. Illustrative non-limiting examples of such α -olefins are one or more of propylene, 1-butene, 1-pentene, 1-hexene, 1-octene, and 1-decene. Included in the term
15 olefins for the purposes of describing effectively copolymerized monomers are the constrained-ring cyclic monoolefins such as cyclobutene, cyclopentene, norbornene, alkyl-substituted norbornes, alkenyl-substituted norbornenes, and the higher carbon number cyclic olefins known in the art, see U.S. patent 5,635,573, incorporated herein by reference for purposes of U.S. patent practice, and known copolymerizable diolefins, e.g., 1,4-hexadiene, ethylidene-norbornene, and vinyl-norbornene. Vinyl aromatic monomers, e.g.,
20 styrene and alkyl-substituted styrene monomers are additionally suitable. The polyethylene copolymers can range from semicrystalline to substantially amorphous; and will typically have a substantially random arrangement of at least the ethylene and the olefin comonomers. As will also be apparent to those skilled in the art, the use of asymmetrically substituted hafnium compounds of the invention enable the preparation of
25 syndiotactic polymers from prochiral olefins, e.g., like propylene. Processes for such will also benefit from the increased productivity and molecular weights described here for ethylene copolymers.

30 The invention ethylene copolymer plastomers will preferably exhibit semicrystalline characteristics, e.g., melting points ranging from about 85 °C to 115 °C. The molecular weight (number-average molecular weight) of the plastomers of the invention will range from about 10,000 to about 60,000, preferably about 20,000 to about 50,000.

The molecular weight for ethylene copolymer plastomers is more typically stated in terms of their polyethylene melt index (MI) (defined in ASTM 1238, Cond. E), those will typically range from 0.01 to 10.0, preferably 0.005 to 6.0, more preferably about 0.01 to less than 3.0. Ethylene copolymer elastomers will typically have $M_n \geq 60,000$ up to about 250,000, and can optionally comprise one or more non-conjugated or cyclic diolefin, in addition to ethylene and one or more α -olefin, typically propylene.

In terms of polymer density, the polymers capable of production in accordance the invention, can range from about 0.850 to about 0.930, preferably from .087 to 0.925, more preferably .089 to 0.920. The plastomers of the invention will contain about 60 to about 80 weight percent ethylene, preferably about 60 to 75 weight percent ethylene.

The catalyst complexes of the invention are also capable of significant comonomer incorporation, for example for ethylene with C_3 - C_8 α -olefins and, optionally, C_5 - C_{20} non-conjugated diolefins, or with any of the other known monomers capable of copolymerization with ethylene, and are capable of high catalyst productivities and high molecular weight copolymers under industrially useful solution polymerization conditions. Such conditions are typically operated at ambient to medium high pressures (that is below about 500 bar) at temperatures ranging from about 40 °C to 140 °C, where the polymerizable monomers are contacted with the catalyst complexes in an essentially liquid phase polymerization medium such as an aliphatic or aromatic solvent or diluent. The catalysts may be supported in accordance with known support methods for metallocene catalysts, particularly for use in slurry polymerization conditions. Both solution and slurry conditions are well known in the art and easily adapted for use with the catalysts according to this invention.

Examples

The following examples are presented to illustrate the foregoing discussion. All parts, proportions and percentages are by weight unless otherwise indicated. Although the examples may be directed to certain embodiments of the present invention, they are not to be viewed as limiting the invention in any specific respect. In Tables 1 and 2, "MCN" is

an abbreviation for metallocene, particularly the hafnocenes of the invention, and "CC" is an abbreviation for co-catalyst.

High Temperature Semi-Batch Polymerization

5

Ethylene/1-octene copolymerizations were carried out in a well-stirred 1 L batch reactor equipped to perform coordination polymerization in the presence of an inert hydrocarbon (hexane) solvent at pressures up to 600 psig and temperatures up to 150°C. In the vapor-liquid (VL) polymerization system, the polymerization occurs in the liquid phase whereas ethylene was continuously fed to the reactor to keep the vapor phase overhead pressure constant at 265 psig during the polymerization. In those experiments, the reactor temperature was kept constant at 140°C by throttling the amount of steam added to the reactor mantle and by adjusting the amount of catalyst fed to the reactor by the pump. Typically, 250 mL of dried hexane, 18 mL of dried 1-octene, and 1.0 mL of a 10 wt% triisobutylaluminum solution (toluene or hexane), a poisons scavenger, were fed to the reactor, which was then brought to 140°C. The reactor content was then pressurized with 265 psi ethylene by feeding ethylene and maintained at constant ethylene pressure throughout the polymerization. The polymerization was started by continuously feeding a pre-activated solution (toluene or hexane) of the catalyst during the polymerization. Pre-activation was accomplished by contacting the catalyst and co-catalyst in toluene prior to introduction into the reactor. The catalyst flow rate was stopped and the reactor was allowed to cool to room temperature and depressurized. The product was precipitated out of solution and then dried in a hood at room temperature overnight.

10

15

20

25

30

Example 1A: Preparation of 6-(*p*-tert-butylphenyl)-6'-(*p*-nbutylphenyl)-fulvene: In a 1000 milliliter round bottom flask, 43.92 grams of the corresponding disubstituted benzophenone were dissolved in tetrahydrofuran (500 milliliters). To this solution was added 90.0 milliliters of sodium cyclopentadienide in tetrahydrofuran (Aldrich, 2.0 M). The reaction mixture was allowed to stir for 3 days in an inert atmosphere (glove box). The reaction mixture was then brought out of the box and poured in 300 milliliters of water. 400 milliliters of diethyl ether were added to the mixture. The organic layer was separated. The aqueous layer was extracted once with diethyl ether. The ether layers were

combined and dried with magnesium sulfate for 4 hours. The magnesium sulfate was separated by filtration. A brick-red oil was obtained after the solvent was evaporated. The product was purified by column chromatography (silica gel, hexane). This gave 39.11 grams of 6-(*p*-*tert*-butylphenyl)-6'-(*p*-*n*butylphenyl)-fulvene. The structure of the product was easily determined by the ^1H NMR collected in CDCl_3 at room temperature. Small impurities are observed in the spectrum, but these impurities do not affect the subsequent reaction.

Example 1B: Preparation of 6-(*p*-*tert*-butylphenyl)-6'-(*p*-methylphenyl)-fulvene:

In a 100 milliliter round bottom flask, 5.13 grams of the appropriated disubstituted benzophenone were dissolved in tetrahydrofuran (50 milliliters). To this solution was added 10.0 milliliters of sodium cyclopentadienide in tetrahydrofuran (Aldrich, 2.0 M). The reaction mixture was allowed to stir for 3 days in an inert atmosphere (glove box). The reaction mixture was then brought out of the box and poured in 30 milliliters of water. 100 milliliters of diethyl ether were added to the mixture. The organic layer was separated. The aqueous layer was extracted once with diethyl ether. The ether layers were combined and dried with magnesium sulfate for 4 hours. The magnesium sulfate was separated by filtration. A brick-red oil similar to the compound described above was obtained after the solvent was evaporated. The product was purified by column chromatography (silica gel, methylenechloride:hexane::9:1). This gave 2.32 grams of 6-(*p*-*tert*-butylphenyl)-6'-(*p*-methylphenyl)-fulvene. The structure of the product was easily determined by the ^1H NMR collected in CDCl_3 at room temperature. Small impurities are observed in the spectrum, but these impurities do not affect the subsequent reaction.

Example 2A: Preparation of (*p*-*t*BuPh)(*p*-*n*BuPh)C(Cp)(Flu)Li. 2.317 grams of

lithium fluorenyl were suspended in 40 milliliters of toluene. To this suspension was added a solution containing 4.608 grams of 6-(*p*-*tert*-butylphenyl)-6'-(*p*-*n*butylphenyl)-fulvene dissolved in approximately 80 milliliters of toluene. The reaction is allowed to stir for 30 minutes. After removing the solvent and triturating with pentane, the solid product was collected by filtration and washed with pentane. This procedure afforded 6.17 grams of product. The identity of the product was established by ^1H NMR in C_6D_6 at room

temperature. The peaks in the aromatic region are broad but clearly defined and easily assigned.

Example 2B: Preparation of $(p\text{-tBuPh})(p\text{-MePh})\text{C}(\text{Cp})(\text{Flu})\text{Li}$. 1.192 grams of lithium fluorenyl were suspended in 40 milliliters of toluene. To this suspension was added a solution containing 2.081 grams of 6-(*p*-tert-butylphenyl)-6'-(*p*-methylphenyl)-fulvene dissolved in approximately 80 milliliters of toluene. The reaction is allowed to stir for 1 hour. After removing the solvent and triturating with pentane, the solid product was collected by filtration and washed with pentane. This procedure afforded 2.960 grams of product. The identity of the product was established by ^1H NMR in C_6D_6 at room temperature. The peaks in the aromatic region are broad but clearly defined and easily assigned.

Example 3A: Preparation of $(p\text{-tBuPh})(p\text{-nBuPh})\text{C}(\text{Cp})(\text{Flu})\text{HfCl}_2$. To a diethyl ether solution containing 5.45 grams of $(p\text{-tBuPh})(p\text{-nBuPh})\text{C}(\text{Cp})(\text{Flu})\text{Li}$ was added 6.6 milliliters of *n*-BuLi (Aldrich, 1.6 M). The lithiation reaction was allowed to stir for 2.5 hours. To the dilithio salt was added 3.45 grams of HfCl_4 as a solid. The reaction mixture was stirred for 14 hours. The lithium chloride was separated by filtration. After evaporating the solvent, the product was extracted with dichloromethane to remove residual lithium chloride. The solvent was removed by evaporation. This left a dark oil. To the oil was added approximately 80 milliliters of pentane and 10 milliliter of diethyl ether. This caused a small amount of solids to precipitate. The mixture was allowed to sit in the refrigerator for 14 hours. This cooling caused more precipitation. The solid product was collected by filtration and dried under vacuum to afford 2.532 grams of an orange solid. Cooling the filtrate for another 4 hours gave a second crop of product (0.680 grams) for a collective yield of 3.212 grams. The identity of the product was established by ^1H NMR in C_6D_6 at room temperature.

Example 3B: Preparation of $(p\text{-tBuPh})(p\text{-MePh})\text{C}(\text{Cp})(\text{Flu})\text{HfCl}_2$. To a diethyl ether solution containing 2.96 grams of $(p\text{-tBuPh})(p\text{-nMePh})\text{C}(\text{Cp})(\text{Flu})\text{Li}$ was added 3.9 milliliters of *n*-BuLi (Aldrich, 1.6 M). The lithiation reaction was allowed to stir for 4

hours. To the dilithio salt was added 2.00 grams of HfCl_4 . The reaction mixture was stirred for 14 hours. After evaporating the solvent, the product was extracted with dichloromethane to remove the lithium chloride. The solvent was removed by evaporation. This left a semisolid which was washed with pentane. The product was collected by filtration and rinse with a small amount of cold pentane to remove hydrocarbon impurities. This procedure provided 3.733 grams of an orange solid. The identity of the product was established by ^1H NMR in C_6D_6 at room temperature.

Example 4A: Methylation of $(p\text{-tBuPh})(p\text{-nBuPh})\text{C}(\text{Cp})(\text{Flu})\text{HfCl}_2$. Three equivalents of MeMgBr (Aldrich, 3.0 M in diethyl ether) were added to a cold suspension containing 3.63 grams of $(p\text{-tBuPh})(p\text{-nBuPh})\text{C}(\text{Cp})(\text{Flu})\text{HfCl}_2$ in toluene (-35°C). The reaction was allowed to reach room temperature over 30 minutes. The reaction was then heated to 80°C for two hours. The heating turns the reaction mixture dark brown. The reaction was filtered using celite to remove a dark solid. To the filtrate was added an excess of trimethylchlorosilane and stirred for 2 hours. This last step ensures that the excess MeLi is quenched. The solvent is replaced by methylenedichloride, and the LiCl precipitate was separated by filtration. The volume is reduced to a minimum and pentane is added to induce precipitation. After cooling overnight the yellow product is collected by filtration. This procedure afforded 1.70 grams of a bright yellow solid. The identity of the product was established by ^1H NMR in C_6D_6 at room temperature.

Example 4B: Methylation of $(p\text{-tBuPh})(p\text{-MePh})\text{C}(\text{Cp})(\text{Flu})\text{HfCl}_2$. Three equivalents of MeMgBr (Aldrich, 3.0 M in diethyl ether) were added to a cold suspension containing 3.70 grams of $(p\text{-tBuPh})(p\text{-MePh})\text{C}(\text{Cp})(\text{Flu})\text{HfCl}_2$ in toluene (-35°C). The reaction was allowed to reach room temperature over 30 minutes. The reaction was then heated to 80°C for two hours. The reaction was filtered through celite to remove a dark solid. To the filtrate was added an excess of trimethylchlorosilane and stirred for 3 hours. This last step ensures that the excess MeLi is quenched. The solvent is replaced by methylenedichloride, and the LiCl precipitate was separated by filtration. The volume is reduced to a minimum and pentane is added to induce precipitation. After cooling

overnight the yellow product is collected by filtration. The identity of the product was established by ^1H NMR in C_6D_6 at room temperature.

5 **Example 5:** Synthesis of $(p\text{-nBuPh})(p\text{-tBuPh})\text{C}(\text{Cp})(2,7\text{-t-BuFlu})\text{HfCl}_2$: To an ether solution consisting of 1.35 grams of 6,6'-diphenylfulvene was added a solution consisting of 1.12 grams of lithium 2,7-di-tert-butylfluorene. After 20 minutes, a beige solid began to precipitate. The reaction was stirred for 6 hours. One equivalent of $n\text{BuLi}$ (7.38 milliliters, 1.6M in diethyl ether, Aldrich) was added to the reaction. After 15 hours the reaction color changed to a burgundy-red and red a precipitate formed. To the red mixture was added 1.26 grams of hafniumtetrachloride. The reaction was allowed to stir for 3 hours. The mixture was orange-yellow with copious precipitate. The solvent was replaced with dichloromethane and filtered. It was necessary to wash the residual solids several times to extract more product. The solvent was removed under reduced pressure. The product was triturated with pentane and collected by filtration. This left an orange solid (1.045 grams).

10

15

Synthesis of $(p\text{-nBuPh})(p\text{-tBuPh})\text{C}(\text{Cp})(2,7\text{-t-BuFlu})\text{HfMe}_2$: To a cold solution (-35°C) containing 1.00 grams of $(p\text{-nBuPh})(p\text{-tBuPh})\text{C}(\text{Cp})(2,7\text{-t-BuFlu})\text{HfCl}_2$ in toluene was added three equivalents of MeMgBr (3.0 M, Aldrich). The reaction was allowed to reach room temperature slowly and then heated at 80°C for 3 hours. This turned the reaction dark brown. The reaction was brought into the glovebox and passed through a celite pad. This allowed an orange solution to be collected. The solvent volume was reduced and the product triturated with pentane. The product was collected by filtration (0.300 grams).

20

25

Symbols for Tables 1-3 below:

<u>Catalyst ("Cat")</u>	<u>Metallocene ("MCN") Compound</u>
A (Comparative)	Diphenylmethylene(cyclopentadienyl)(fluorenyl) hafnium dimethyl
B(Comparative)	(p-tert-butylphenyl)(p-methylphenyl)methylene(cyclopentadienyl) (fluorenyl) hafnium dimethyl
C	(p-tert-butylphenyl)(p-n-butylphenyl)methylene(cyclopentadienyl) (fluorenyl) hafnium dimethyl
D	(p-tert-butylphenyl)(p-n-butylphenyl)methylene(cyclopentadienyl) (2,7-di-tert-butylfluorenyl) hafnium dimethyl
E (Comparative)	di(p-tert-butylphenyl)methylene(cyclopentadienyl) (2,7-di-tert-butyl- fluorenyl) hafnium dimethyl
<u>Activator ("Act")</u>	<u>Compound</u>
I	[N,N-dimethylanilinium][tetrakis(pentafluorophenyl)borate]

5

Table 1

<u>Cat/Act*</u>	<u>Yield (g)</u>	<u>Activity (g/mmol*min)</u>	<u>Wt % C8</u>	<u>Mw</u>	<u>Mn</u>	<u>Mw/Mn</u>
1) A/I	16.8	375	22.7	155562	60828	2.56
2) B/I	17.8	147	20.8	181976	64125	2.84
3) C/I	19.5	517	21.0	153617	16358	9.39
4) C/I	10.9	743	Nm	340782	75466	4.52
5) C/I	13.9	1037	Nm	187160	79822	2.34

* All polymerizations ran for 10 minutes, with the exception of B/I, which was 19 minutes. The symbol "nm" means not measured.

10

Table 2

<u>Cat/Act*</u>	<u>Yield (g)</u>	<u>Activity</u> <u>(g/mmol*min)</u>	<u>MI(dg/min)</u> <u>(ASTM D-1238(E))</u>
1) A/I	16.8	375	0.041
6) D/I	14.1	778	0.009
7) D/I	19.0	715	0.012

* Polymerizations conducted as for Table 1.

5

Table 3

<u>Cat/Act*</u>	<u>Activity</u> <u>(g-polymer/ g-cat)</u>	<u>Wt % C8</u>	<u>Mw</u>	<u>Mn</u>	<u>Mw/Mn</u>
8) A/I ¹	250	29.2	152.7	69.1	2.22
9) E/I ²	273	24.8	215.3	98.9	2.18

* notes : All polymerizations were conducted as done for Tables 1 and 2 above except that Table 3 reactions were stopped after 30 min. ¹ The values reported were the averages of 5 runs where the amount of MNC was varied between 10.5 and 20 mg. ² The values reported were the averages of 3 runs where the amount of MCN was varied between 5 and 10.5 mg.

10

15

20

25

As can be seen in Table 1, the invention catalysts of examples 3) - 5) show significant improvement in actives, and to a lesser extent, improvements in weight- and number-average molecular weight where the bridge aryl-groups are substituted in accordance with the invention, as opposed to where not. The Mw/Mn measurement for 3) is suspect but the variance observed is not understood at this time. It is believed that a repeat under the conditions used would yield molecular weight values in line with 4) and 5). Table 2 illustrates a direct comparison for the MCN "A", with unsubstituted bridge aryl groups and unsubstituted fluorenyl groups, against MCN "D" having both bridge aryl group substitution and fluorenyl group substitution in accordance with the invention. Table 3 illustrates MCN "E" with alkyl substitution on the bridge aryl groups, that substitution not including the C₃ or greater linear n-alkyl of the invention, and substitution

on fluorenyl group as for MCN "D" of the invention. It is apparent that the activities of 8) and 9) are comparable but with 9) showing improvement in molecular weights. Since 8) illustrates a standard for comparison with MCN "A", the same standard for Tables 1 and 2, "E" is expected to show similar activities to those exhibited by "A" and is inferior to "C" and "D" of the invention.

CLAIMS:

1. A polymerization process for ethylene copolymers having a density of about 0.850 to about 0.930 comprising contacting, under homogeneous polymerization conditions at a reaction temperature at or above 60 °C to 250 °C, ethylene and one or more comonomers capable of insertion polymerization with a hafnocene catalyst complex derived from

A) a biscyclopentadienyl hafnium organometallic compound having

i) at least one unsubstituted cyclopentadienyl ligand or aromatic fused-ring substituted cyclopentadienyl ligand,

ii) one aromatic fused-ring substituted cyclopentadienyl ligand,

iii) and a covalent bridge connecting the two cyclopentadienyl ligands, said bridge comprising a single carbon or silicon atom with two aryl groups, each substituted with a C₁ - C₂₀ hydrocarbyl or hydrocarbylsilyl at least one of which is a linear C₃ or greater substituent; and

B) an activating cocatalyst compound.

2. The process of claim 1 wherein said activating cocatalyst compound comprises a halogenated tetraaryl-substituted Group 13 anion wherein at least one aryl substituent contains at least two cyclic aromatic rings.

3. The process of claim 2 wherein the aryl substituent comprises at least one fused polycyclic aromatic ring.

4. The process of claim 3 wherein fused polycyclic aromatic ring contains such that at least three hydrogen atoms on ring carbons have been replaced with fluorine atoms.

5. The process of claim 4 wherein said halogenated tetraaryl Group 13 anion is [tetrakis(perfluoro-naphthyl)borate].

6. The process of claim 2 wherein the aryl groups of said halogenated tetraaryl Group 13 anion comprises at least one aromatic ring pendant in the 4 position to a phenyl ligand.

7. The process of claim 6 wherein said halogenated tetraaryl Group 13 anion is [tetrakis(perfluoro-4-biphenyl)borate].

8. The process of any of claims 2-7 wherein said cocatalyst compound comprises an essentially cationic complex selected from substituted or unsubstituted anilinium, ammonium, carbenium and silylium cationic complexes.

9. The process of claims 1-8 wherein said aromatic fused-ring substituted cyclopentadienyl ligand ii) is a substituted or unsubstituted fluorenyl ligand.

10. The process of any of claims 1-9 wherein said unsubstituted cyclopentadienyl ligand or aromatic fused-ring substituted cyclopentadienyl ligand i) is an unsubstituted cyclopentadienyl or indenyl ligand.

11. The process of any of claims 1-10 wherein said hafnium compound is selected from the group consisting of (p-tert-butylphenyl)(p-n-butylphenyl)methylene(cyclopentadienyl) (fluorenyl) hafnium dimethyl, (p-tert-butylphenyl)(p-n-butylphenyl)methylene(cyclopentadienyl)(2,7-dimethyl-9-fluorenyl) hafnium dimethyl and (p-tert-butylphenyl)(p-n-butylphenyl)methylene(cyclopentadienyl)(2,7-di-tert-butyl-9-fluorenyl) hafnium dimethyl.

12. The process of any of claims 1-11 wherein said hafnium compound is covalently bridged between the biscyclopentadienyl ligands with a substituted silicon atom.

13. The process of any of claims 1-12 wherein said homogeneous polymerization conditions are adiabatically conducted in a continuous polymerization process.

5 14. The process of any of claims 1-13 wherein the reaction temperature is in a range of 140 °C to 220 °C.

15. The process of claim 13 wherein said one or more comonomers capable of insertion polymerization are selected from the group consisting of propylene, 1-butene, 1-hexene, 1-octene, 1, 4-hexadiene, ethylidene-norbornene and vinyl norbornene.

10

16. The process of claim 14 wherein said homogeneous polymerization conditions are conducted in a continuous process at a pressure of at least 500 bar.

15 17. The process of claim 16 wherein said one or more comonomers capable of insertion polymerization are selected from the group consisting of propylene, 1-butene, 1-hexene, and 1-octene.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/24600

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C08F210/02 C08F4/643

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C08F C07F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CHEMICAL ABSTRACTS, vol. 124, no. 14, 1 April 1996 (1996-04-01) Columbus, Ohio, US; abstract no. 177218, INOE, NORIHIDE ET AL: "Novel transition metal compounds for polymerization of olefins with improved efficiency and polymerization of olefins using them" XP002130381 abstract	1,9-13, 15
A	& JP 07 247309 A (MITSUI TOATSU CHEMICALS, JAPAN) 26 September 1995 (1995-09-26) — —/—	2-4,6,8, 14,16,17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "S" document member of the same patent family

Date of the actual completion of the international search

21 February 2000

Date of mailing of the international search report

16/03/2000

Name and mailing address of the ISA
European Patent Office, P.B. 6818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3018

Authorized officer

Parry, J

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/24600

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 824 113 A (HOECHST AG) 18 February 1998 (1998-02-18) page 4, line 48 -page 13, line 5 page 13, line 9 -page 14, line 45 examples 6,7	2-4,6,8
A	WO 96 28480 A (DOW CHEMICAL CO) 19 September 1996 (1996-09-19) page 11, line 5 -page 12, line 35 page 14, line 13 - line 17	2,3,6,8
A	WO 97 29845 A (UNIV NORTHWESTERN) 21 August 1997 (1997-08-21) figures 1,4,6,7; examples 8,10	2,6-8
A	EP 0 786 466 A (TOSOH CORP) 30 July 1997 (1997-07-30) page 4, line 16 - line 18 page 4, line 37 - line 39 examples 5,6	1-17
P,X	WO 99 45040 A (EXXON CHEMICAL PATENTS INC) 10 September 1999 (1999-09-10) cited in the application page 8, line 29 - line 30 page 12, line 26 -page 14, line 2; claim 1; example 1	1-17

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 99/24600

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 7247309 A	26-09-1995	NONE	
EP 0824113 A	18-02-1998	DE 19632557 A	19-02-1998
		AU 3413397 A	19-02-1998
		BR 9704310 A	15-06-1999
		BR 9704354 A	12-01-1999
		CA 2212668 A	13-02-1998
		CN 1182093 A	20-05-1998
		CN 1174205 A	25-02-1998
		EP 0824112 A	18-02-1998
		JP 10139806 A	26-05-1998
		JP 10158269 A	16-06-1998
		NO 973707 A	16-02-1998
WO 9628480 A	19-09-1996	AU 712417 B	04-11-1999
		AU 5357496 A	02-10-1996
		BR 9604776 A	23-06-1998
		CA 2214885 A	19-09-1996
		CN 1181091 A	06-05-1998
		CZ 9702853 A	18-02-1998
		EP 0856014 A	05-08-1998
		HU 9801224 A	28-08-1998
		JP 11503113 T	23-03-1999
		NO 974166 A	07-11-1997
		PL 322177 A	19-01-1998
		US 5834393 A	10-11-1998
WO 9729845 A	21-08-1997	US 5856256 A	05-01-1999
		CA 2247137 A	21-08-1997
		EP 0881948 A	09-12-1999
EP 0786466 A	30-07-1997	JP 10226694 A	25-08-1998
WO 9945040 A	10-09-1999	AU 2801899 A	20-09-1999
		AU 2888499 A	20-09-1999
		AU 2889399 A	20-09-1999
		AU 2894299 A	20-09-1999
		AU 3067899 A	20-09-1999
		WO 9945049 A	10-09-1999
		WO 9945046 A	10-09-1999
		WO 9945041 A	10-09-1999
		WO 9945042 A	10-09-1999
		AU 2886199 A	20-09-1999
		WO 9945047 A	10-09-1999
JP 10292006 A	04-11-1998	NONE	